


CONTEMPO 780/6

Contempo 780/6 is a hybrid for people wishing to build residential or light commercial roofs because it offers some of the additional strength that industrial roofs require.

PRODUCT SPECIFICATIONS

Overall Cover Width: 804mm Effective Width Cover: 776mm Length: Customized to preference Base Material: Zinc Paint: Superior paint quality with eco-friendly properties. Finish: Plain and Wrinkle Thickness: 0.25mm, 0.32mm Minimum Gauge: 30G Maximum Gauge: 28G

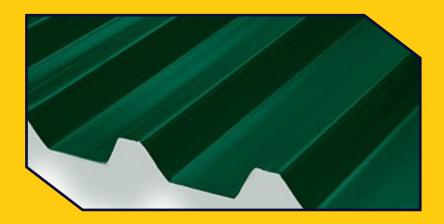

BENEFITS

- Reduced risk of condensation as a result of rolling a flock material underside
- Cuts cost associated with full insulated panels
- Non-corrosive
- High Chemical Resistance
- Eco-friendly

APPLICATION

- Institute project
- Roof cladding
- Side cladding
- Decking
- False ceiling





We offer fast and free delivery, nationwide.

EFFECTIVE	STOCK	GAUGES	MIN	MAX
COVER	LENGTH		LENGTH	LENGTH
776 MM± 5	2.0M, 2.5M, 3M & CUSTOM LENGTH	30 (G)	0.5M	6M

To learn more about our wide variety of products please visit: www.rafikiroofingmabati.com/shop

ROOF PROFILE



Overall Cover Width: 804mm



FIXING ROOF

To fit our Contempo profile roofing sheets we would always advise you to overlap the smooth side onto the side with the drainage as pictured below. This will then help any driving rainwater runoff your sheeting and not under your overlap and into your building.

The purlins should be a minimum of 50mm in width in order to screw your sheeting easily and quickly.

To get an estimate, scan the QR Code, or contact our offices on: +254 20 7658103 +254 706 012 345





ROOF FIX DIAGRAM



Contempo profile is ideal for light commercial projects such as community buildings like Churches and Schools. It is particularly durable due to its added strength.