




BOX 975

An angular trapezoidal profile with small valleys, five trough and six ribs that bring out a unique design on your roof. It can be crimped into curves of 400mm radius to enhance its use and aesthetic properties.

PRODUCT SPECIFICATIONS

Overall Cover Width: 1050mm
Effective Width Cover: 975mm
Length: Customized to preference
Base Material: Zinc
Paint: Superior paint quality with eco-friendly properties.
Finish: Plain and Wrinkle
Thickness: 0.32mm, 0.4mm
Minimum Gauge: 28G
Maximum Gauge: 26G

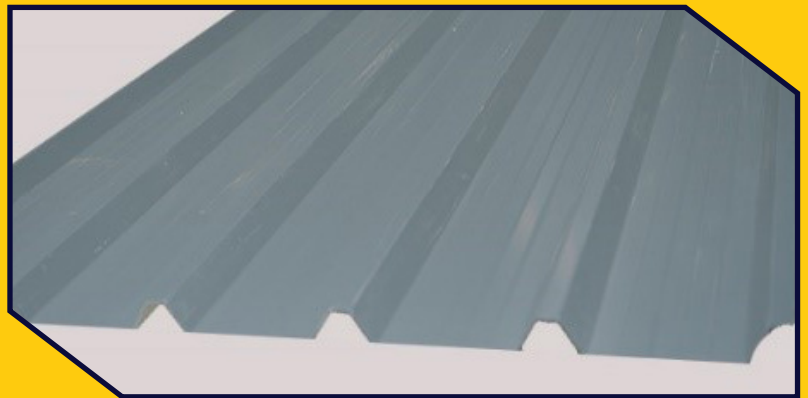

BENEFITS

- Quick and easy to install.
- Long life span.
- High heat resistance.
- Conveniently handled on the site due to its lightweight.
- Chemical resistance.
- Eco-friendly.

APPLICATION

- Institute project
- Roof cladding
- Side cladding
- Decking
- False ceiling



We offer fast and free delivery, nationwide.

EFFECTIVE COVER	STOCK LENGTH	GAUGES	MIN LENGTH	MAX LENGTH
975 MM± 5	2.0M, 2.5M, 3M & CUSTOM LENGTH	28 (G)	0.5M	7M
		26 (G)	0.5M	6M

To learn more about our wide variety of products please visit:
www.rafikiroofingmabati.com/shop



ROOF PROFILE



Overall Cover Width: 1050mm



BOX 975 FIXING GUIDELINES

FIXING ROOF

At eaves and ridge purlins, there are two fixings per purlins/sheet, whereas all intermediate purlins need one fixing in overlap only. This pattern has to be altered for locations exposed to heavy storms and wind pressure.

RECOMMENDED FOR CLADDING / VALLEY FIXING PATTERNS


Steel Girts:

For every alternate valley, use no. 12 x 20mm screw.

Timber Girts:

Use no. 20 x 25mm woodscrews for every alternate valley pressure.

To get an estimate,
scan the QR Code, or
contact our offices on:
+254 20 7658103
+254 706 012 345



TEAM RAFIKI

ROOF FIX DIAGRAM



RECOMMENDED FOR ROOFING / CREST FIXING PATTERNS

For Steel Purlins:

For crests along with the purlins, use 12 x 65mm screws and use stitching screws along the side lap at 600mm spacing.

For Timber Purlins:

For alternate crests along with the purlins, use 12 x 65mm self-drilling woodscrews and stitching screws along the side lap at 600mm spacing.

